

Dviced 3 in 1 foldable magnetic wireless charger stand



Thank you for choosing the **Dviced 3-in-1 Foldable Magnetic Wireless Charger Stand**. This manual will help you set up and use your charger properly while maintaining it for long-lasting performance.

1. Product Overview

- Product Name: Dviced 3-in-1 Foldable Magnetic Wireless Charger Stand
- Material: Aluminum Alloy + ABS + TPU
- Input: 9V / 3.33A
- Phone Output: 15W Max
- Earphone Output: 5W Max
- Watch Output: 5W Max
- Charging Interface: USB-C

This charging stand is designed to wirelessly charge three devices simultaneously, including smartphones, earphones, and smartwatches. It features a foldable design, making it portable and easy to carry.

2. Compatible Devices

- iPhones (with Magnetic Attachment):
 - iPhone 16 Pro Max / 16 Pro / 16 Plus / 16 (The charger is equipped with Qi2 technology, which enables more efficient charging for the iPhone 16 series.)

- iPhone 15 Pro Max / 15 Pro / 15 Plus / 15
- iPhone 14 Pro Max / 14 Pro / 14 Plus / 14
- iPhone 13 Pro Max / 13 Pro / 13 / 13 mini
- iPhone 12 Pro Max / 12 Pro / 12 / 12 mini
- Apple Watches:
 - Apple Watch Series Ultra 2 / 10 / 9 / 8 / Ultra / SE 2 / 7 / 6 / SE / 5 / 4 / 3 / 2
- AirPods:
 - AirPods Pro 2 / AirPods 4 / AirPods 3 / AirPods Pro / AirPods 2

3. Installation Instructions

a. Setting Up:

- Connect the provided **USB-C cable** to the charging port on the back of the stand.
- Plug the other end of the cable into a power adapter that supports the required input (9V / 3.33A).

b. Charging Multiple Devices:

- **For iPhone:** Align your iPhone with the magnetic charging area. The magnets will hold the phone securely and ensure efficient charging (up to 15W).
- **For AirPods:** Place your AirPods on the designated charging spot to begin wireless charging (up to 5W).
- **For Apple Watch:** Lay your Apple Watch on the watch charging area to initiate charging (up to 5W).

c. Folding Design:

- The stand features a foldable design for easy portability. Adjust the angle to your preferred viewing position while charging.

4. Cleaning and Maintenance

- **Cleaning:** Wipe the surface of the charger with a soft, dry cloth. Avoid using water or harsh chemicals to clean the charger, as they may damage the materials.
- **Storage:** When not in use, store the charger in a cool, dry place. Keep it away from direct sunlight or high heat to prevent damage.

5. Troubleshooting

Device Not Charging:

- Check if the devices are compatible with the charger and are correctly aligned with the charging spots.
- Ensure the power adapter meets the input requirements (9V / 3.33A).

Slow Charging:

- Make sure the power adapter is providing enough power to support fast charging. Double-check the charging cable for any issues.

Overheating:

- If the charger becomes warm during use, disconnect it and allow it to cool before resuming use.

6. Safety Information

- Do not store device in high-temperature environment, including heat caused by intense sunlight or other forms of heat.
- Do not place device in fire or other excessively hot environments. Exposure to fire or temperature above 212°F(100C) may cause explosion.

- Do not use the wireless charger in excess of its output rating. Over loading outputs above rating may result in a risk of fire or injury to persons.
- Do not expose the wireless charger to rain or snow.
- Do not modify, repair or disassemble the unity, if so, please contact the manufacturer. Switch off the wireless charger when not in use. The wireless charger will automatically switch off when disconnected from its wall charger.

7. Warranty


This product is covered by a warranty. If you encounter any issues or defects, please contact our customer service team for assistance.

8. How to use?


- Charge phone only



- Charge Earphone only

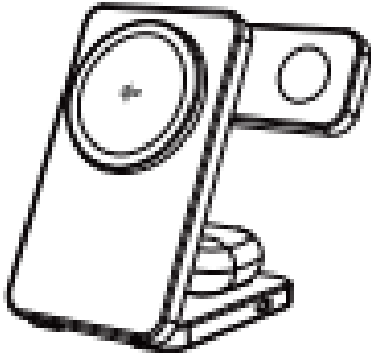


- Charging for Apple Watch only

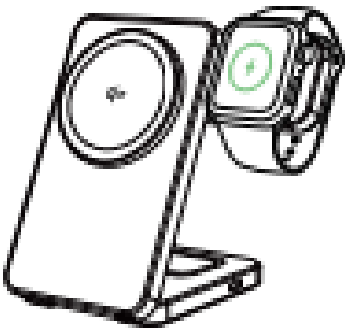


- Folding tips:


Currently in fully folded condition (suitable for carrying).



Lift in the direction of the arrow to 65° (to get the best view).

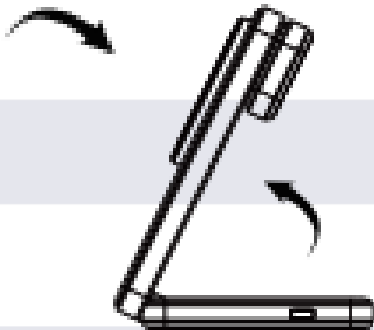

Spin out from right to left, rotate to adjust by 90° or 180° (for charging the watch).

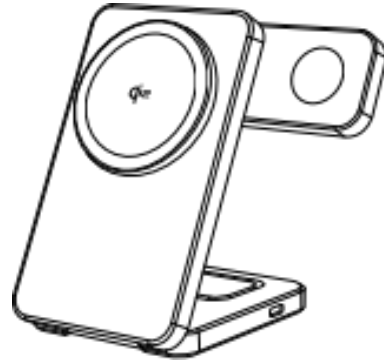

9. Please Note:

- Only use certified PD 25W up Charging Wall Adapter to charge the device, do not plug into computer USB port or any other non-certified USB port.
- Place your Qi-enabled device accurately in the wireless charging area when charging.
- PD 25W up adapter is required when charging mobile phones can be quickly charged.
- Make sure to disconnect the device from power when cleaning.
- It is normal and safe to hear a humming noise when very close to the charger. It means that this wireless charger is adjusting its temperature to achieve a more efficient charging speed.
- If your device can not be fully charged, this may due to high environmental temperature, please recharge after the temperature is lowered. Our charger has temperature control to safeguard your device when charging.